

LED vandal-resistant luminaires

Luminaires suitable for internal or external use. Strong high-pressure die-cast aluminium body and flame-retardant polycarbonate cover. Edge-lit design distributes the light where it is needed reducing light pollution. Maintained emergency versions and microwave detector versions are available.

Applications: security areas, precincts, subways, passages and corridors.

- Strong high-pressure die-cast LM2 aluminium body
- 3 mm fire-retardant polycarbonate cover
- Two distribution versions optimised for wall or ceiling mounting
- Tamper-resistant cover screws as standard
- Optional bezel trim for semi-recessed mounting
- Microwave presence detector versions with stand-by light level feature
- SmartScan emergency version with wireless test status reporting
- Optional photocell control (not suitable for ceiling, semi-recessed or cornice mounting)



IP66

IK10

Up to 113.1 LL/CW

SMARTSCAN

LUXGUARD

Specification

Mounting	Surface	IP rating	IP66
Impact rating	IK10	Max presence detection height	2.4 m

Lighting

Optic	Clear cover	Lumen output	1,535 lm - 2,035 lm
Efficacy	Up to 113.1 LL/CW		

Emergency data

Emergency lumen output	220 lm - 250 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	12 W - 16 W	Circuit power	15 W - 18 W
-----------	-------------	---------------	-------------


LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	100 K - L80/B10		

Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes		

Dimensions

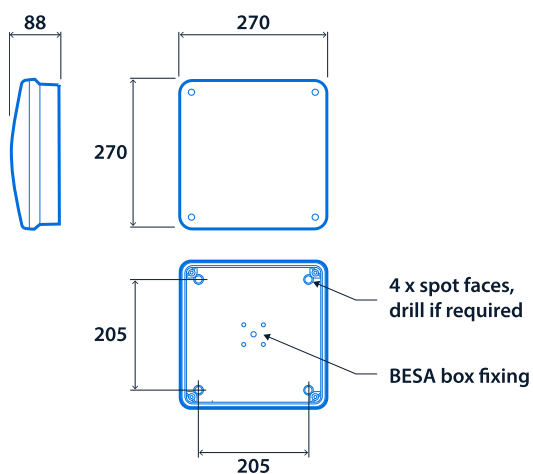



Click or scan here
View Prismalette Pro variants
using our online filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.