

Master control and web interface with SmartScan wireless communication

Transmits SmartScan and SmartScan emergency luminaire status reports to the SmartScan web server. Monitors and controls up to 50 wireless luminaires - ideal for smaller projects. Controls emergency lighting testing dates/times and external lighting switching times.

- Polycarbonate body finished white (RAL9016)
- Central monitoring for up to 50 SmartScan and SmartScan emergency luminaires - ideal for smaller projects
- Central time control for SmartScan External luminaires
- Communicates with the SmartScan website using MQTT mobile telecommunications
- Enables scheduled emergency test times / dates managed using the SmartScan website
- Status Indicators show operational condition
- Software security updates will be provided for a minimum of 10 years
- Ethernet connection for alternate connectivity to SmartScan website



Notes: SmartScan Gateway Lite is limited to a single poll every 24 hours and no live occupancy detection option.




Specification

IP rating	IP65
-----------	------

Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes		

Dimensions

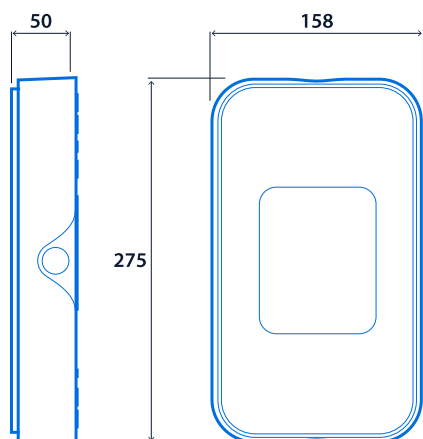

Click or scan here
View SmartScan Gateway Lite
variants using our online
filtering tool



Information is correct as of 28 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.