

Multi-purpose, anti-ligature and corrosion-resistant luminaires

Robust and durable luminaires with a polycarbonate cover. Extruded aluminium body with die-cast ends. Long life silicone sponge gasket ensuring IP66 rating. Cover secured using tamper-resistant pin Torx screws.

- Robust and durable extruded aluminium body dissipates heat, ensuring long control gear life in higher ambient temperatures
- High impact-resistant, flame-retardant polycarbonate cover
- Cover secured using tamper-resistant T25 pin Torx screws
- Removable gear tray, hangs on safety straps for easy maintenance
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP66

IK10

Up to 172 LL/CW

SMARTSCAN

LUXGUARD

Specification

| | | | |
|---------------|---------|--------------|--------------------|
| Mounting | Surface | IP rating | IP66 |
| Impact rating | IK10 | Nominal size | 1200 mm 1500 mm |

Lighting

| | | | |
|----------|-----------------|--------------|---------------------|
| Optic | Clear cover | Lumen output | 3,030 lm - 8,145 lm |
| Efficacy | Up to 172 LL/CW | | |

Emergency data

| | | | |
|------------------------|-----------------|-----------------------|-----------------------------|
| Emergency lumen output | 560 lm - 630 lm | Emergency type | Maintained |
| Emergency duration | 3 hours | Battery specification | Nickel Metal Hydride (NiMH) |

Power

| | | | |
|-----------|-------------|---------------|-------------|
| LED power | 16 W - 44 W | Circuit power | 21 W - 55 W |
|-----------|-------------|---------------|-------------|


LED characteristics


| | | | |
|--------------------|-----------------|--------------------|--------|
| CRI | 80+ | Colour temperature | 4000 K |
| Rated life (hours) | 100 K - L70/B10 | | |

Compliance

| | | | |
|--------------|-----|----|-----|
| UKCA | Yes | CE | Yes |
| C-Tick (Aus) | Yes | | |

Dimensions

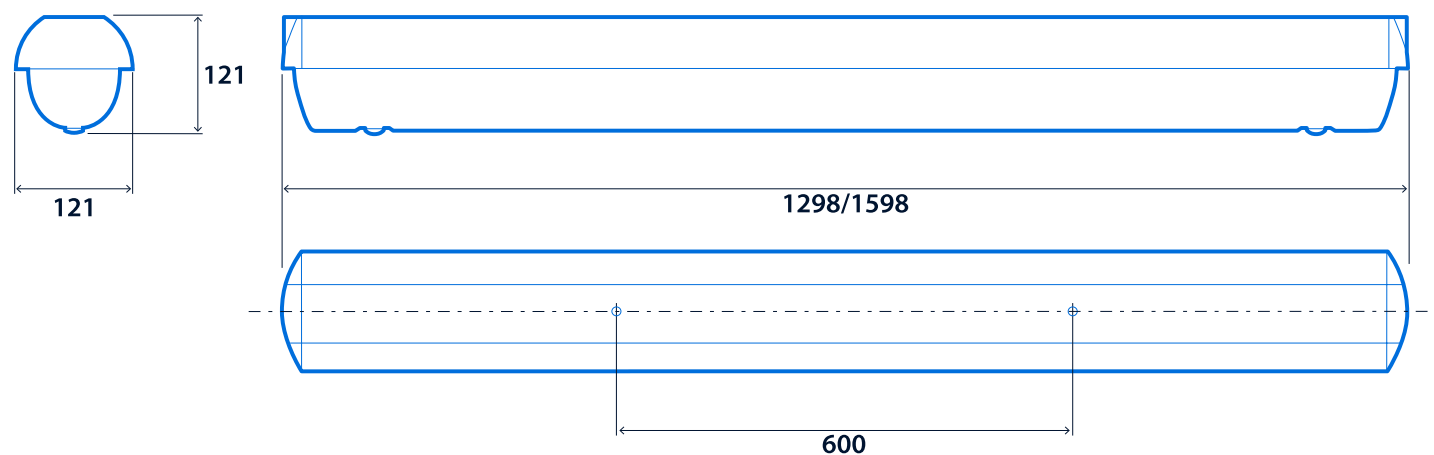



Click or scan here

View A-Line AL variants using
our online filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.