

Master colour temperature control and web interface for ColourActive luminaires

Transmits colour temperature control commands from the SmartScan web server.

Applications: For use on all ColourActive schemes.

- Polycarbonate body finished white (RAL9016), silicone keypad
- Central control for ColourActive luminaires
- Communicates with the SmartScan website using GSM mobile telecommunications
- Wireless control of incremental shifts in colour temperature governed by settings on the SmartScan website

Notes: A ColourActive Gateway only provides colour temperature control. If energy monitoring and status information feedback is required an additional SmartScan Gateway is required.




Specification

IP rating **IP65**

Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes		

Dimensions

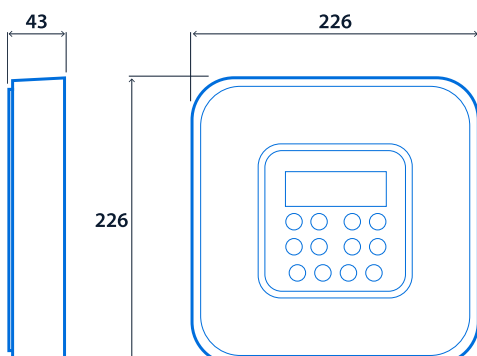

ColourActive Gateway



Click or scan here
View ColourActive Gateway
variants using our online
filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.