

Master colour temperature control and web interface for ColourActive luminaires

Transmits colour temperature control commands from the SmartScan web server.

Applications: For use on all ColourActive schemes.

- Polycarbonate body finished white (RAL9016), silicone keypad
- Central control for ColourActive luminaires
- Communicates with the SmartScan website using GSM mobile telecommunications
- Wireless control of incremental shifts in colour temperature governed by settings on the SmartScan website

Notes: A ColourActive Gateway only provides colour temperature control. If energy monitoring and status information feedback is required an additional SmartScan Gateway is required.



Lighting management

Lighting control system	ColourActive SmartScan Internal SmartScan Radar
-------------------------	-------------------------------------------------------


Specification

IP rating	IP65
-----------	------

Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes	SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

Dimensions

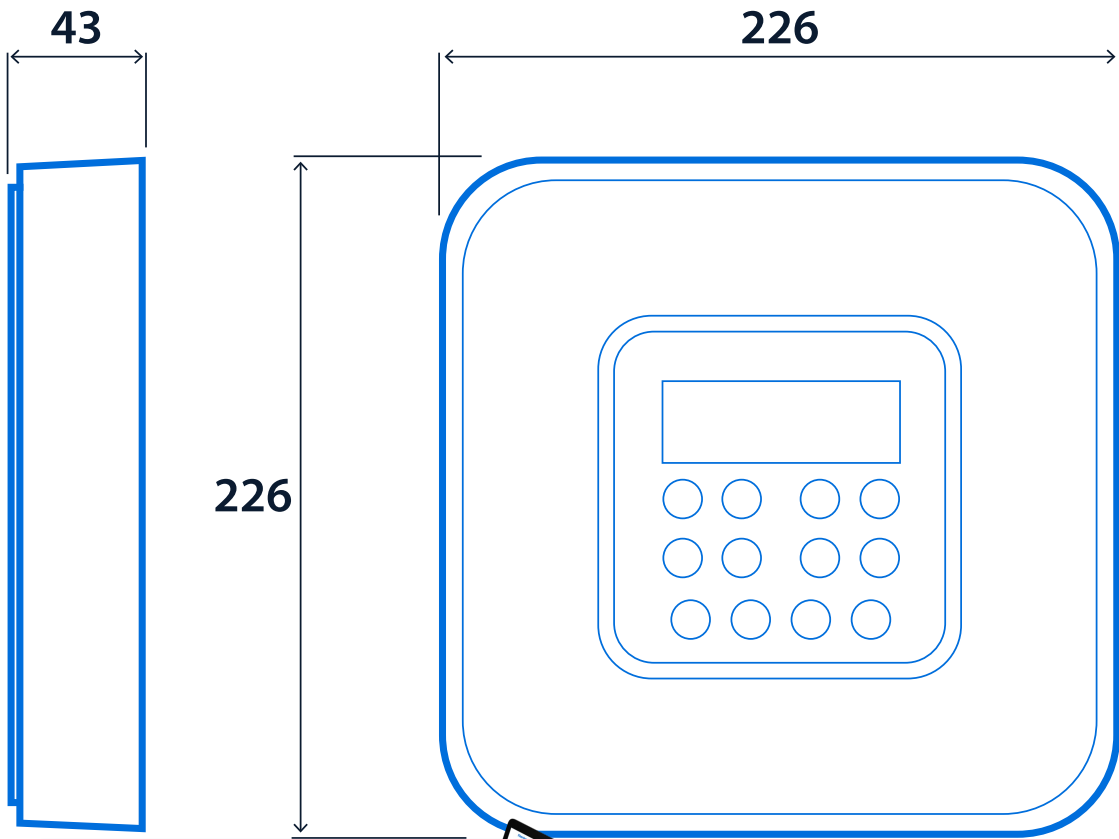

View the range

