

High Dependency Linear

Recessed luminaires for high dependency/intensive care ward areas

Recessed luminaires with steel body and aluminium frame. Asymmetrical distribution to direct light towards the bed. Ultra low glare V-blade louvre set behind a clear polycarbonate cover.

Applications: high dependency / intensive care hospital wards.

- Asymmetrical distribution directs light towards bed
- Ultra low glare V-blade louvre set behind a clear polycarbonate cover
- Snap fix screw-less frame
- Supplied with side arm suspension kit
- Fits 24mm exposed T-bar ceilings (other ceiling type options available to special order)
- ColourControl versions available to special order

Notes: CRI 90 and ColourControl versions available to special order



IP54 (IP20 above ceiling)

86.9 LL/CW

Specification

Mounting	Recessed	IP rating	IP54 (IP20 above ceiling)
Nominal size	1200 x 150 mm		

Lighting

Optic	V-blade louvre	Lumen output	3,735 lm
Efficacy	86.9 LL/CW		

Power

LED power	38 W	Circuit power	43 W
-----------	------	---------------	------



LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	70 K - L70/B10		

Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes	Thermoplastic rating	TP(a)

Dimensions

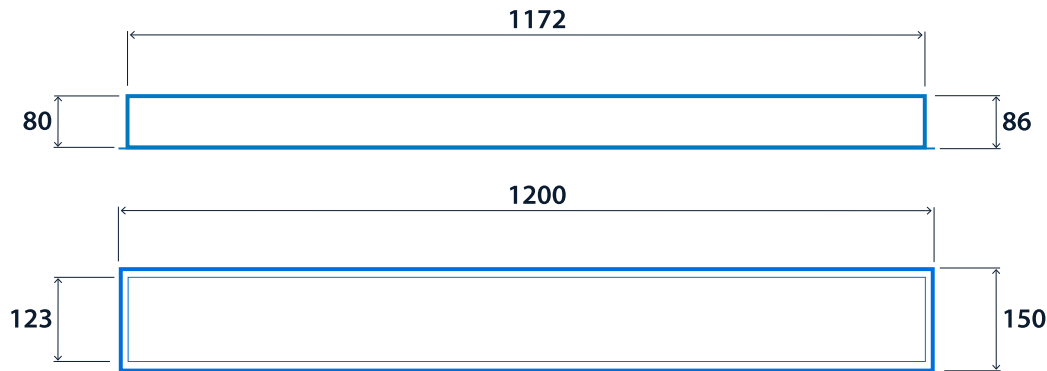

Click or scan here
View High Dependency Linear
variants using our online
filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.