

## Stainless steel heavy duty corrosion resistant luminaires

Heavy duty corrosion resistant luminaires manufactured from 1.6mm stainless steel. Polycarbonate or 5mm toughened safety glass front panel.

- Body in 1.2 mm and front frame in 1.6 mm stainless steel
- 5 mm clear, flat, polycarbonate panel or 5 mm clear toughened/safety glass
- Asymmetric light distribution
- Quick-release front cover
- Specialist designs to suit application (subject to minimum order quantity)
- Retro-fit LED gear trays for upgrading original fluorescent versions available to special order



IP66
Up to 131.4 LL/CW
LUXGUARD

### Specification

Mounting	Surface	IP rating	IP66
----------	---------	-----------	------

### Lighting

Optic	Clear glass cover Clear polycarbonate cover	Lumen output	3,865 lm - 5,255 lm
Efficacy	Up to 131.4 LL/CW		

### Power

LED power	27 W - 35 W	Circuit power	34 W - 40 W
-----------	-------------	---------------	-------------


### LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	100 K - L80/B10		

## Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes		

## Dimensions

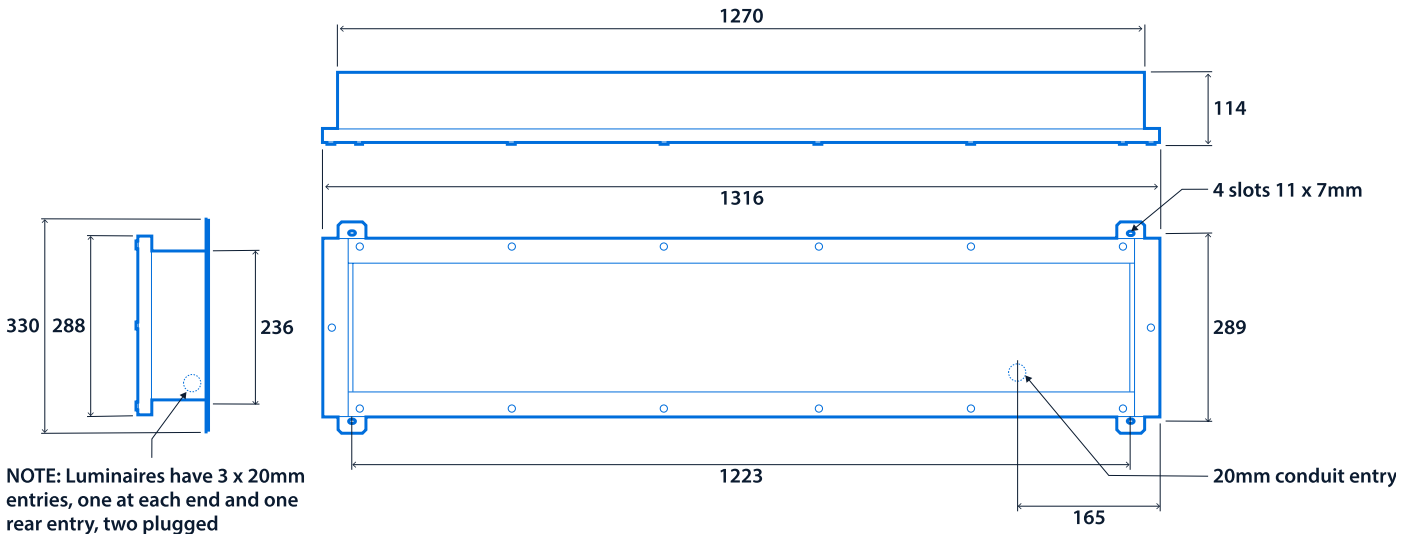

**Click or scan here**  
View Pitlight variants using  
our online filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.