


Wireless manual colour control, switching and dimming of SmartScan ColourActive luminaires

Impact resistant manual control for SmartScan luminaires. 12 buttons providing On (Eco), Off, 5 fixed colour temperature levels and 5 fixed dimming levels.

- 12 buttons providing On (Eco), Off, 5 fixed colour temperature levels and 5 fixed dimming levels
- Mains (230 V) or battery powered versions available
- Communicates wirelessly with SmartScan luminaires
- Mains versions have additional wireless connectivity allowing control from the SmartScan App (iOS and Android)
- Requires a 35 mm deep single-gang back box (mains version only)
- Battery version is supplied complete with batteries and self-adhesive tape and can be mounted directly to the wall
- Multiple touch plates can be used to provide multi-point control
- Programmable using the SmartScan programmer

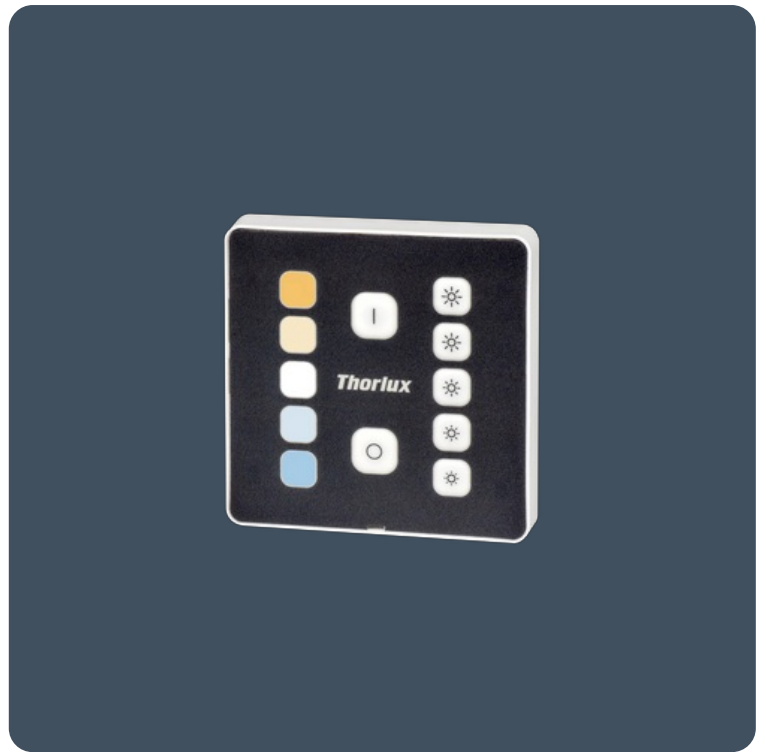

Lighting management


Lighting control system

ColourActive
SmartScan Internal
SmartScan Radar

Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes	SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

Dimensions





View the
range



Information is correct as of 29 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.