

Master control and web interface with SmartScan wireless communication

The SmartScan Gateway transmits energy performance and status reports for both standard and emergency luminaires to the SmartScan web server.

- Polycarbonate body finished white (RAL9016)
- Central monitoring for up to 250 SmartScan and SmartScan emergency luminaires. Extra Gateways can be fitted to accommodate more luminaires
- Central time control for SmartScan External luminaires
- Communicates with the SmartScan website using MQTT mobile telecommunications
- Enables scheduled emergency test times / dates managed using the SmartScan website
- Status Indicators show operational condition
- Software security updates will be provided for a minimum of 10 years
- Ethernet connection for alternate connectivity to SmartScan website




Specification

IP rating IP65

Compliance

| | | | |
|--------------|-----|----|-----|
| UKCA | Yes | CE | Yes |
| C-Tick (Aus) | Yes | | |

Dimensions

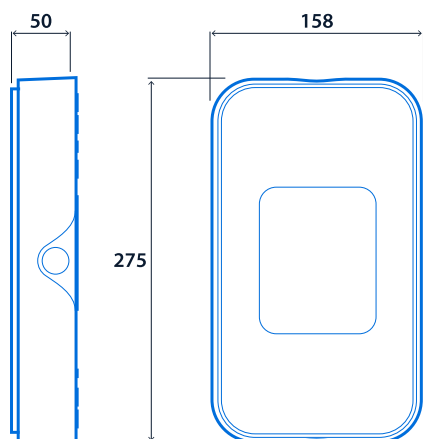

Click or scan here
View SmartScan Gateway
variants using our online
filtering tool



Information is correct as of 11 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.