

## Master control and web interface with SmartScan wireless communication

Transmits SmartScan and SmartScan emergency luminaire status reports to the SmartScan web server. Monitors and controls up to 50 wireless luminaires - ideal for smaller projects. Controls emergency lighting testing dates/times and external lighting switching times.

- Polycarbonate body finished white (RAL9016)
- Central monitoring for up to 50 SmartScan and SmartScan emergency luminaires - ideal for smaller projects
- Central time control for SmartScan External luminaires
- Communicates with the SmartScan website using MQTT mobile telecommunications
- Enables scheduled emergency test times / dates managed using the SmartScan website
- Status Indicators show operational condition
- Software security updates will be provided for a minimum of 10 years
- Ethernet connection for alternate connectivity to SmartScan website



Notes: SmartScan Gateway Lite is limited to a single poll every 24 hours and no live occupancy detection option.

IP65


### Specification

IP rating IP65

### Compliance

UKCA	Yes	CE	Yes
C-Tick (Aus)	Yes		

## Dimensions

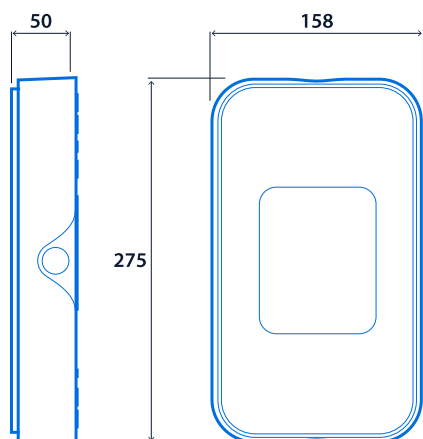

**Click or scan here**  
View SmartScan Gateway Lite  
variants using our online  
filtering tool



Information is correct as of 12 Mar 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.