


LED area floodlights

IP66 wall or pole-mounted LED luminaire with aluminium cast body and wiring box with glass cover. Integral high-quality driver. Emergency, SmartScan and photocell options.

Applications include car parks, amenity areas, sports areas, and large open spaces.

- Strong high pressure die-cast LM6 aluminium body with clear toughened/safety glass cover
- Area or flood distribution options
- Integral high efficiency driver
- Extremely efficient and long system life up to 100,000 hours
- Universal bracket for wall or column mounting
- Photocell option
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: Warmer colour temperatures available to special order

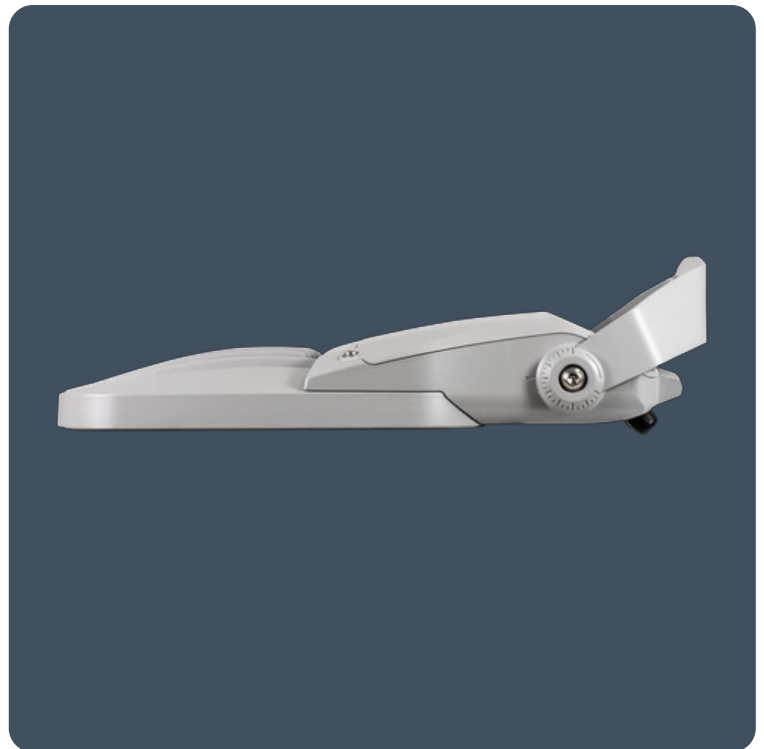

Up to IP66

IK08

Up to 141.0 LL/CW

SMART SCAN

LED PROTECT

Specification

| | | | |
|---------------|----------------|-------------------------------|------------|
| Mounting | Column Surface | IP rating | Up to IP66 |
| Impact rating | IK08 | Max presence detection height | 8 m |

Lighting

| | | | |
|----------|-------------------|--------------|----------------------|
| Optic | Clear cover | Lumen output | 3,810 lm - 37,315 lm |
| Efficacy | Up to 141.0 LL/CW | | |

Emergency data

| | | | |
|-----------------------|-----------------------------|--------------------|---------|
| Emergency type | Maintained | Emergency duration | 3 hours |
| Battery specification | Nickel Metal Hydride (NiMH) | | |

Power

| | | | |
|-----------|--------------|---------------|--------------|
| LED power | 31 W - 276 W | Circuit power | 35 W - 297 W |
|-----------|--------------|---------------|--------------|


LED characteristics

| | | | |
|--------------------|-----------------|--------------------|------------------|
| CRI | 70+ | Colour temperature | 3000 K 4000 K |
| Rated life (hours) | 100 K - L90/B10 | | |

Compliance

| | | | |
|--------------|-----|----|-----|
| UKCA | Yes | CE | Yes |
| C-Tick (Aus) | Yes | | |

Dimensions

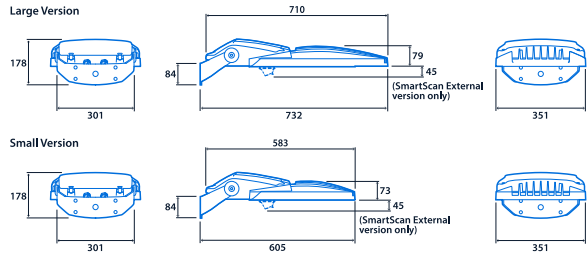



View the range



Information is correct as of 22 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.