

## Track mounted adjustable spotlights

Strike S is a stylish track mounted luminaire with discrete in-track control gear and is the smallest in the Strike spotlight range. The low glare optics provide a smooth distribution and are available in either narrow (26°), wide (37°) or flood (53°) beams.

Supplied with CRI 90 LEDs for excellent colour quality, in either 3000 K or 4000 K as standard. Rotatable through 350° azimuth and 90° vertically for a full range of movement, makes Strike S a versatile lighting option for the space. For use with the Track system.

Applications: Display & feature, retail, reception areas, hospitality, art galleries, museums, libraries

- Die-cast aluminium body
- 350° azimuth adjustment
- 90° vertical adjustment
- Low glare optical control
- Optimised beam distribution using lens for reduced spill light
- Fitted with CRI 90 LEDs, suitable for retail applications
- Suitable for installation into Global track



IP20

Up to 123.1 LL/CW

## Specification

|          |       |           |      |
|----------|-------|-----------|------|
| Mounting | Track | IP rating | IP20 |
|----------|-------|-----------|------|

## Lighting

|              |                   |          |                   |
|--------------|-------------------|----------|-------------------|
| Lumen output | 900 lm - 2,225 lm | Efficacy | Up to 123.1 LL/CW |
|--------------|-------------------|----------|-------------------|

## Power

|           |            |               |            |
|-----------|------------|---------------|------------|
| LED power | 6 W - 17 W | Circuit power | 8 W - 20 W |
|-----------|------------|---------------|------------|


## LED characteristics

|                    |                |                    |                  |
|--------------------|----------------|--------------------|------------------|
| CRI                | 90+            | Colour temperature | 3000 K<br>4000 K |
| Rated life (hours) | 67 K - L80/B10 |                    |                  |

## Compliance

|              |     |    |     |
|--------------|-----|----|-----|
| UKCA         | Yes | CE | Yes |
| C-Tick (Aus) | Yes |    |     |

## Dimensions

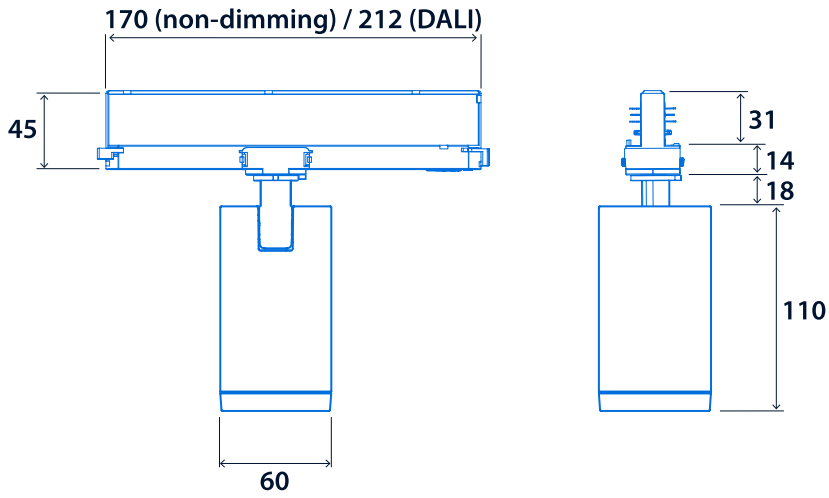

Track mounted non-dimming in white



Track mounted DALI dimming in black




Narrow optic - 26° beam



Wide optic - 37° beam



Flood optic - 53° beam



**Click or scan here**  
View Strike S variants using  
our online filtering tool



Information is correct as of 11 Feb 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.