

Suspended direct/indirect LED luminaires

High performance LED. Available as individually suspended, end to end or continuous versions using infill sections and corner joints. Ultra-slim-line, with excellent uniform upward light performance. Supplied pre-wired and fully assembled, complete with suspensions, for rapid installation.

Infill sections are complete with interconnecting wiring and can contain spotlights or emergency SmartScan LED downlighters.

Applications: Offices, school, libraries.

- Direct/indirect illumination
- Individual or continuous mounting options
- Supplied fully assembled
- Supplied with easily adjustable wire suspensions

Notes: It is recommended that a maximum of 10 Light Line Continuous luminaires are connected to each 10A fused light circuit



IP20

Up to 143.4 LL/CW

Specification

| | | | |
|-------------------------------|-----------|-----------|------|
| Mounting | Suspended | IP rating | IP20 |
| Max presence detection height | 8 m | | |

Lighting

| | | | |
|--------------|---------------------|----------|-------------------|
| Lumen output | 4,015 lm - 6,485 lm | Efficacy | Up to 143.4 LL/CW |
|--------------|---------------------|----------|-------------------|

Emergency data

| | | | |
|------------------------|---------|-----------------------|-----------------------------|
| Emergency lumen output | 370 lm | Emergency type | Maintained |
| Emergency duration | 3 hours | Battery specification | Nickel Metal Hydride (NiMH) |

Power

| | | | |
|-----------|-------------|---------------|-------------|
| LED power | 24 W - 42 W | Circuit power | 28 W - 48 W |
|-----------|-------------|---------------|-------------|

LED characteristics


| | | | |
|--------------------|----------------|--------------------|--------|
| CRI | 80+ | Colour temperature | 4000 K |
| Rated life (hours) | 90 K - L80/B10 | | |

Compliance


| | | | |
|--------------|-----|----|-----|
| UKCA | Yes | CE | Yes |
| C-Tick (Aus) | Yes | | |

Dimensions


Light Line Individual

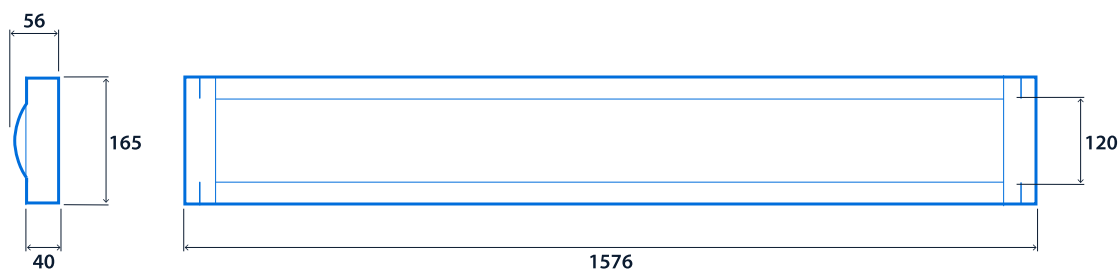

Light Line Continuous

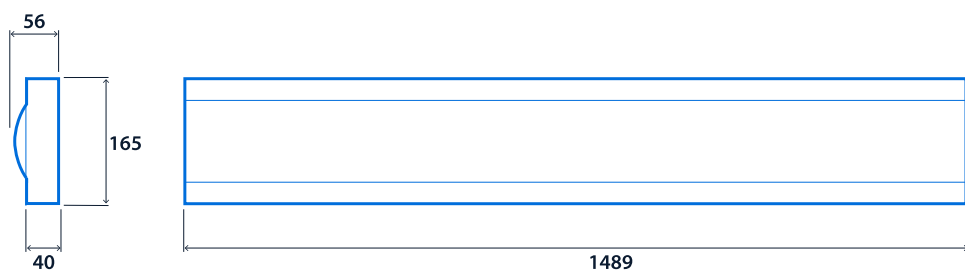


Light Line Infill

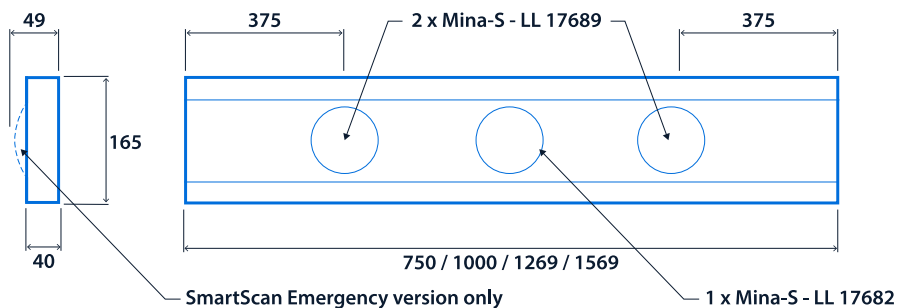

Thorlux Light Line



Click or scan here
View Thorlux Light Line
variants using our online
filtering tool



Information is correct as of 22 Feb 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.